



# TR-5860TR / TR-5860TG Trim Ring Kit Product Installation Document

PN LS10304-001TR-E:A 02/03/21 ECN: 151608

TRIGA Life Safety Systems, LLC

7600 Olde Eight Rd, Hudson, Ohio, 44236-1057

Tel: +1 330-577-5199, Email: info@trigaglobal.com

## 1 Description

The TR-5860TR (red) or the TR-5860TG (gray) Trim Ring Kit provides a finished look to surface mount the TR-RD1G (gray) or the TR-5860TR (red) remote annunciator.

### 1.1 Compatibility

Use the TR-5860TG (gray) or TR-5860TR (red) with the compatible Triga TR-RD1G. For additional information, refer to the following FACP Installation Documents. The documents are located on the Triga website, www.trigaglobal.com.

Document	Document Part Number
TR-2100ECSR Manual	LS10143-003TR-E
TR-RPS1 Manual	LS10259-002TR-E
Triga ECS Manual	LS10262-002TR-E
TR-RD1G Instructions	LS10258-002TR-E

## 2 Mounting/Installation

### 2.1 Panel Mounting Requirements

It is important to protect the TR-5860TG (gray) or TR-5860TR (red) and its contents from water. To prevent water damage, follow the mounting requirements listed below:

- Do not mount the panel directly on exterior walls, especially masonry walls (condensation).
- Do not mount the panel directly on exterior walls below grade (condensation).
- Protect the panel from the plumbing leaks.
- Protect the panel from splash caused by sprinkler inspection ports.
- Do not mount the panel in areas with humidity-generating equipment (such as dryers, production machinery).
- Mount the panel in an area that always remains within the following temperature and humidity range: 0°C-49°C (32°F-120°F) and 10%-93% at 30°C (86°F) non-condensing.
- Mount the panel in an indoor, dry location.



**WARNING:** THE ELECTRONIC COMPONENTS ON THE TR-RD1G AND THE FACP ARE SENSITIVE TO ELECTROSTATIC DISCHARGE. WEAR A GROUNDING STRAP WHEN HANDLING ANY OF THE BOARDS.

### 2.2 Installation

To install the trim rings, refer to the following steps.

1. Position and secure the remote annunciator to the inside of the wall.
2. After you secure the remote annunciator to the wall, position and secure the trim rings in place as shown in Figure 1.

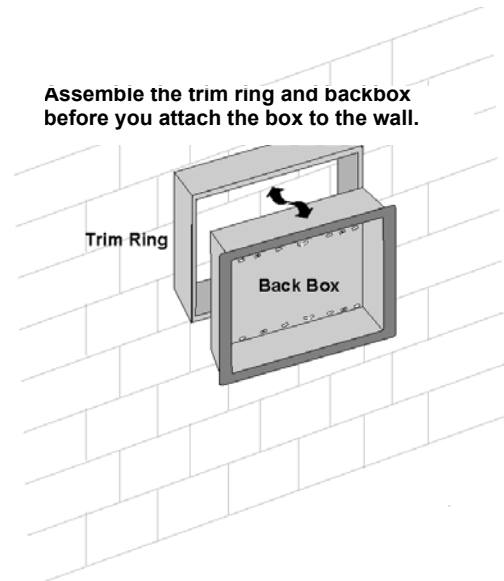


Figure 1 Surface Mounting