




# TR-ISO-6

## Six Fault Isolator Module

The TR-ISO-6 Six Fault Isolator Module provides six equivalent circuits that will allow a portion of the communications loop to continue operating when a short circuit occurs on that loop.

The TR-ISO-6 Six Fault Isolator Module has an amber LED indicator that will blink in the normal state for each of the six inputs and will latch on during a short circuit condition. The module will automatically restore the communications loop to normal condition when the short circuit is removed.

The TR-ISO-6 Six Isolator Module is an automatic switch that opens when the line voltage drops below four volts. Isolator modules should be spaced between groups of sensors or modules in a loop to protect the rest of the loop. If a short occurs between any two isolators, then both isolators immediately switch to an open circuit state and isolate the devices between them. The remaining units on the loop continue to fully operate.

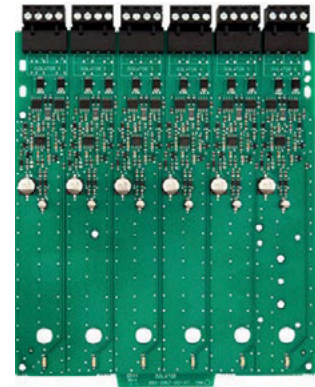

**TR-ISO-6**

### APPLICATIONS

The TR-ISO-6 Fault Isolator Modules should be spaced between groups of sensors in an SLC to protect the rest of the loop. Use to isolate short circuit problems within a section of a loop so that other sections can continue to operate normally. The TR-ISO-6 supports a maximum of 25 devices between isolators.

## FEATURES & BENEFITS

- Removable 12 to 18 AWG plug-in terminal blocks
- Individual LED status indicators
- Six individual, Class B isolator circuits
- Mount up to two modules in IDP-ACB enclosure (optional)
- Mounting hardware included
- UL Listed
- FM Approved



## Technical Specifications

### SPECIFICATIONS

**Physical:** 6.8"H x 5.8"W x 1.0"D

**Shipping Weight:** 1.1 lbs (.50g) including pkg.

**Mounting Option:** TR-IDP-ACB

### ELECTRICAL RATINGS

**Operating Voltage:** 15 to 32VDC

**Standby Current:** 450  $\mu$ A per circuit, 2.7mA all circuits.

**Alarm Current Draw:** 17mA per circuit in isolation, 102mA with all circuits in isolation.

### ENVIRONMENTAL

**Operating Temperature:** 32°-120°F (0°C – 49°C)

**Humidity:** 10 to 85% (non-condensing)

### ORDERING INFORMATION

**TR-ISO-6:** Six Isolator module

### ACCESSORIES

**TR-IDP-ACB:** Optional cabinet for one or two modules.

**Dimensions:** 12.5"W x 15.25"H x 3"D  
(31.8 cm W x 38.7cm H x 7.6 cm D)

### COMPATIBILITY

The TR-ISO-6 is compatible with the following Triga Series FACPs:

- TR-2100R / TR-2100B
- TR-2100ECSR / TR-2100ECSB
- TR-R2100R / TR-R2100B

This document is not intended to be used for installation purposes. We try to keep our product information up-to date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

**TRIGA INVESTMENTS, LLC**  
340 Taxiway Bravo Beeville, TX 78102,  
Tel: +1330-577-5199. Email:info@trigaglobal.com